

# CUBRO 10/100/1000 COPPER TAP

DATA SHEET



## Network TAP At a glance

#### Definition

A network TAP (test access point) is an external monitoring device that mirrors the traffic that passes between two network nodes. A TAP is a hardware device inserted at a specific point in the network to monitor data.

# Advantages of Copper TAP

- Provides complete traffic visibility and access to any network connection
- Transparent access
- Transfers all network traffic, including errors to the monitoring tools
- Extra uptime protection makes the TAPs more reliable
- PoE Transparent

#### **Product Review**




The Cubro 10/100/1000 Copper TAP allows the uninterrupted passage of full duplex data over standard Category 5/6 copper network cable. Featuring auto negotiating between 10Mbps, 100Mbps and 1000Mbps, this TAP duplicates the network signals, including any existing physical errors to the transmit-only monitoring ports.

This advanced 10/100/1000 Copper TAP is a fully new development based on the latest PHY chips. There are some special add-ons available like PoE transparent (PoE = Power over Ethernet)

#### Functions / Benefits:

The Cubro 10/100/1000 Copper TAP supports fast link recovery to ensure the fastest possible time to re-establish a link after a power down. This time is also related to the link partners and fully predictable.

This Copper TAP also allows to look at the physical details and change some parameters for a faster recovery.

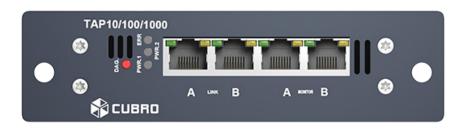

DATA SHEET | CUBRO 10/100/1000 COPPER TAP


### **Product Capabilities / Features**


| Tapping 10/100/1000 Ethernet<br>links | One link to two outputs  |
|---------------------------------------|--|
| Fault Propagation                     | If the link on the input port is going down, the output ports will follow with a short delay                     |
| LED Indicators                        | Status, link speed   |
| Power                                 | 12 V/DC Dual Power Versions  |
| Propagation Delay (In to Out)         | < 1 ns   |
| MTBF                                  | 674768 hours   |
| Operating Temperature                 | 0 to 55°C  |
| Operating Humidity                    | 80% maximum relative humidity  |
| Physical Dimensions (H x W x<br>D)    | 3 x 11,2 x 17 cm<br>1,8 x 4,4 x 6,7 in   |
| Rugged Aluminum Housing               | Stable Aluminium Housing with precise connector labeling on front panel.<br>19" Rack mounting kit also available |

#### **Additional Information**

A Cubro 10/100/1000 Copper TAP is not a passive device. The illustration shows the function of the copper TAP.

In power mode the relays are open, and the link is connected to a Phy. chip. In the case of power down the relays close and the two-link partners are connected to each other. This is the reason for a little downtime. To avoid this, Cubro offers a small UPS module to power the TAPs during the outage.

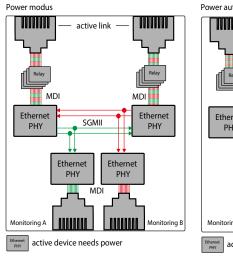

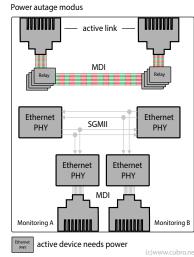

DATA SHEET | CUBRO 10/100/1000 COPPER TAP

## **Ordering Information**

| Product Type & Number    | Description   |
|--------------------------|---|
| CBR.TAP-10/100/1000-B-R3 | 10/100/1000 TAP B Type, 1 Link, 1/3 19" rackmount housing<br>(rackmount kit not included) |
| CBR.PS-12                | Power supply AC/DC 240V AC-85V AC to 12V DC   |
| CBR.RM19-3               | Cubro 19" Rackmount Kit for 3x 1/3 19" units  |

For more information please check our website <u>www.cubro.com</u>.